




DIMENSIONS:

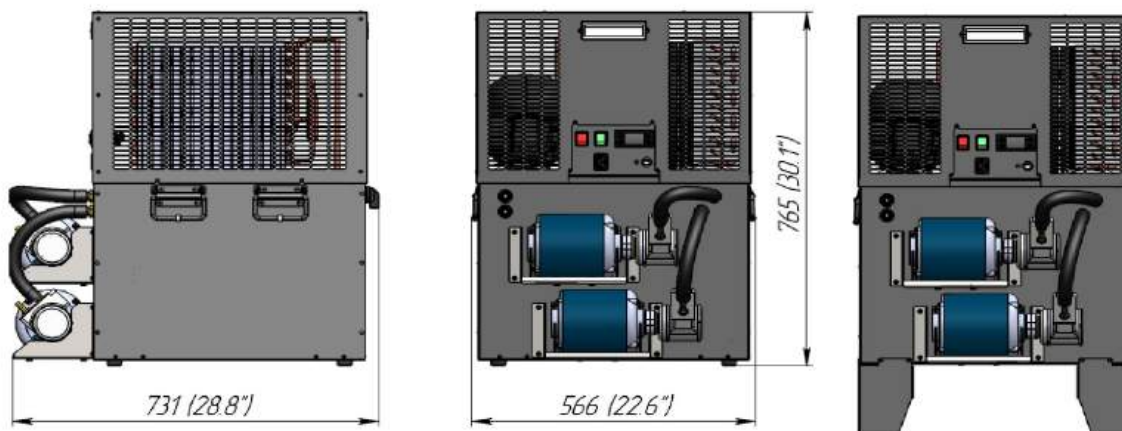

CANADA

UBC COOL CANADA INC
1715 MEYERSIDE DRIVE, UNIT 7-9,
MISSISSAUGA, ON, CANADA, L5T1C5

ph.: +1 (905) 629-2597
Toll Free: +1 (866) 995-9965
fax.: +1 (905) 629-2577
Email: info@beer-co.ca

USA

UBC DISTRIBUTION USA INC
65 NORTH CENTRAL DR.
O'FALLON, MO 63366

ph.: +1 (636) 379-2226
Toll Free: +1 (888) 808-9286
fax.: +1 (866) 659-8904
Email: info@beer-co.us


MÉXICO

GRUPO CERVECERO UKRANIANO,
S.A DE C.V. TOKIO 714, PORTALES SUR,
BENITO JUÁREZ CIUDAD DE MÉXICO 03300


Tel: +52 (55) 2624 3458
Cel: +52 1 (55) 48668127
Email: info@beer-co.com.mx

INTERNAL NUMBER	150.00.000.00-XX
PART NUMBER	BC-5500-2
MAXIMUM DISTANCE, FT	up to 450
CAPACITY, BTU/H	5500
GLYCOL TANK CAPACITY, GAL	18
COMPRESSOR POWER, HP	3/4
RUNNING, AMP	15.0
PLUG TYPE (NEMA #)	5-20P 
VOLTAGE, V	115
FREQUENCY, HZ	60
PUMP TYPE	Vane with 1/3 hp motor
PUMP, GPH	80
NUMBER OF PRE-INSTALLED PUMPS	2
NUMBER OF ADDITIONAL PUMPS	0
REFRIGERANT	R290
REFRIGERANT CHARGE, G (OZ)	150 (5.29)
WEIGHT GROSS/NET, LB	163/ 156
POWER CORD LENGTH, FT	6
INLET/OUTLET BARB, IN	red tube 3/4" NPT / blue tube 3/4" NPT
OPERATING AMBIENT TEMPERATURE, F	60-90
CLEARANCE AT LEAST	12" around the entire unit
GLYCOL MIXTURE, VOL%	40 % glycol and 60% water

WIRING DIAGRAM

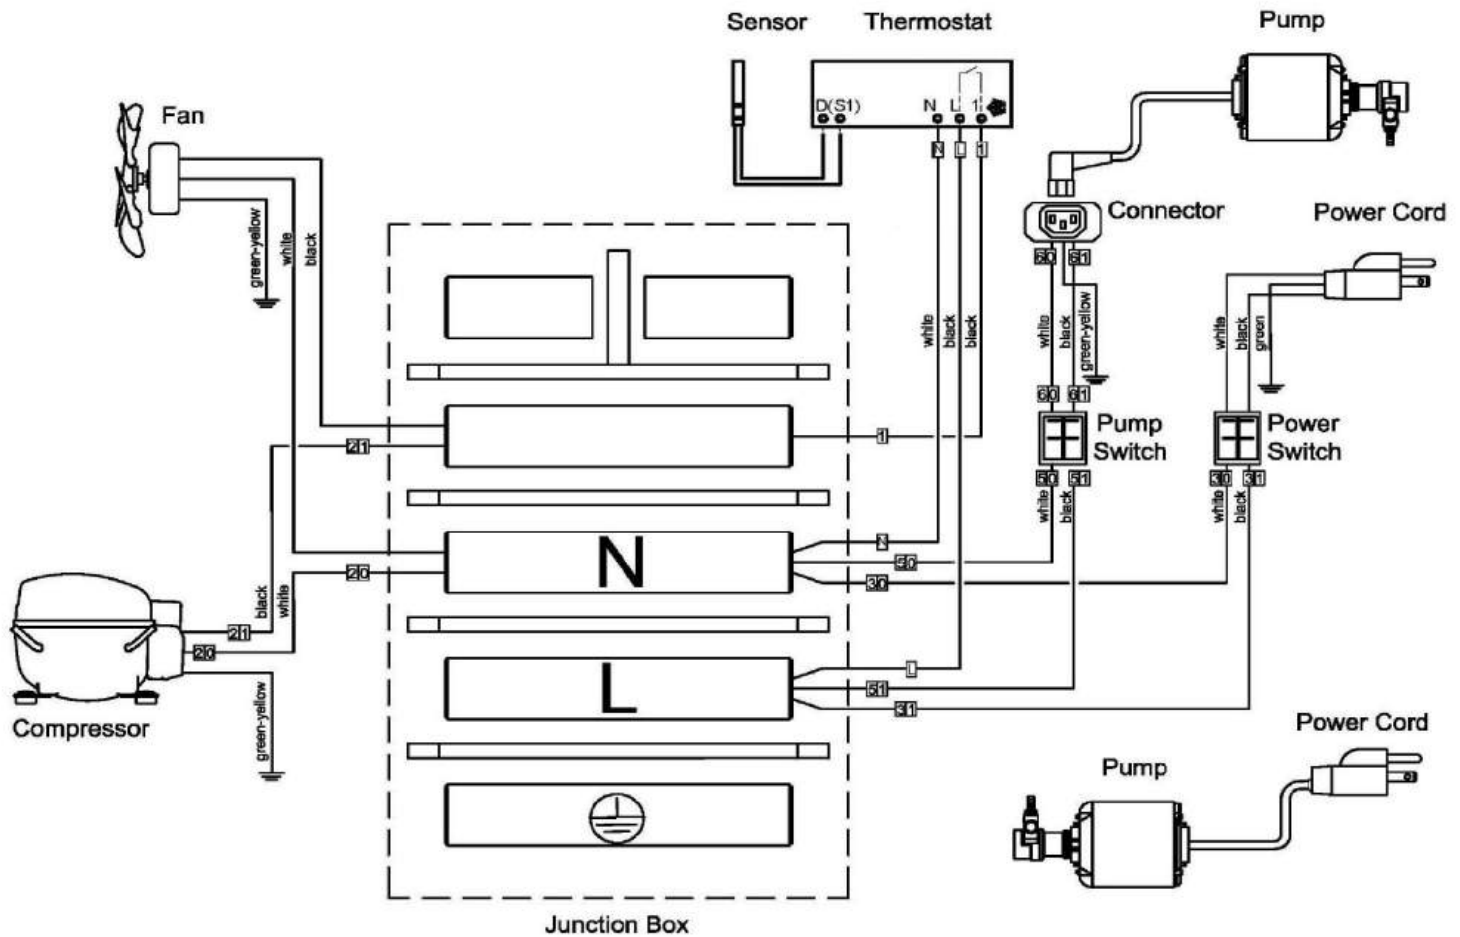

PARTS

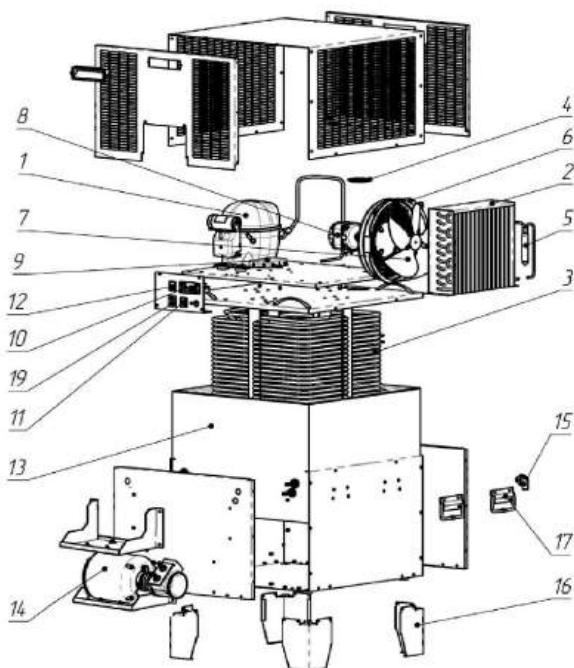

1	Compressor "EMBRACO" NEU 6214U 115 V/60Hz or "SECO" NLE11MN 115 V/60Hz
2	Air condenser "KARYER" B-26460
3	Evaporator
4	Cap
5	Filter-drier "DE-NA" GR-15 d6.1xd6.1xd2.5
6	Plastic grid "KARYER"
7	Impeller $\varnothing 254$ mm., $\alpha=280$
8	Electric motor "ELCO" NU 16-30-2/096 (115V/50-60Hz) UL "WGMotors" YZF 18-25 (18W)(110-120V/60Hz) or "SW" YZ16-25 (16W)(110-120V/60Hz)
9	Junction box "ITW ELETTRIGIBI" PA104
10	Thermostat "ELIWELL" EWPlus 961 EW17YIOXB4A02 (115 V/ 60Hz) or "DANFOSS" ERC 111A (208-230 V/ 60Hz)
11	Power switch "ARCOLECTRIC" C6053ALBR (Red)
12	Power switch "ARCOLECTRIC" C6053ALBG (Green)
13	Glycol bath
14	Glycol pump «FLUID-O-TECH» PA 2501 («PROCON» 102A080F11BA), cover to the pump « FLUID-O-TECH », set union joint « FLUID-OTECH » 48 YZ and motor "UBC" YU250-4G01 (115V/60Hz)
15	Overflow
16	Foot
17	Handle
18	Connector R302SN 250V 10A