



Features:

- Single or double glass door display fridge with ventilator cooling system
- LED interior lights
- Adjustable/removable plastic coated wire shelves
- Shelves can be set-up to hold standard full size hotel pans
- Bottom-mounted cooling unit is easy to remove and clean
- Outstanding temperature preservation reduces energy consumption via foamed-in polyurethane cell insulation

- Auto evaporation of defrosting water
- Round corner design for inner bottom shelf to facilitate easy cleaning
- Cold air circulation via fan for temperature balance
- Refrigeration unit holds 33°F to 45°F (0°C to 8°C) for optimum food preservation

Warranty:


- Two year parts and labour; Five years on compressor.



Intertek



Intertek

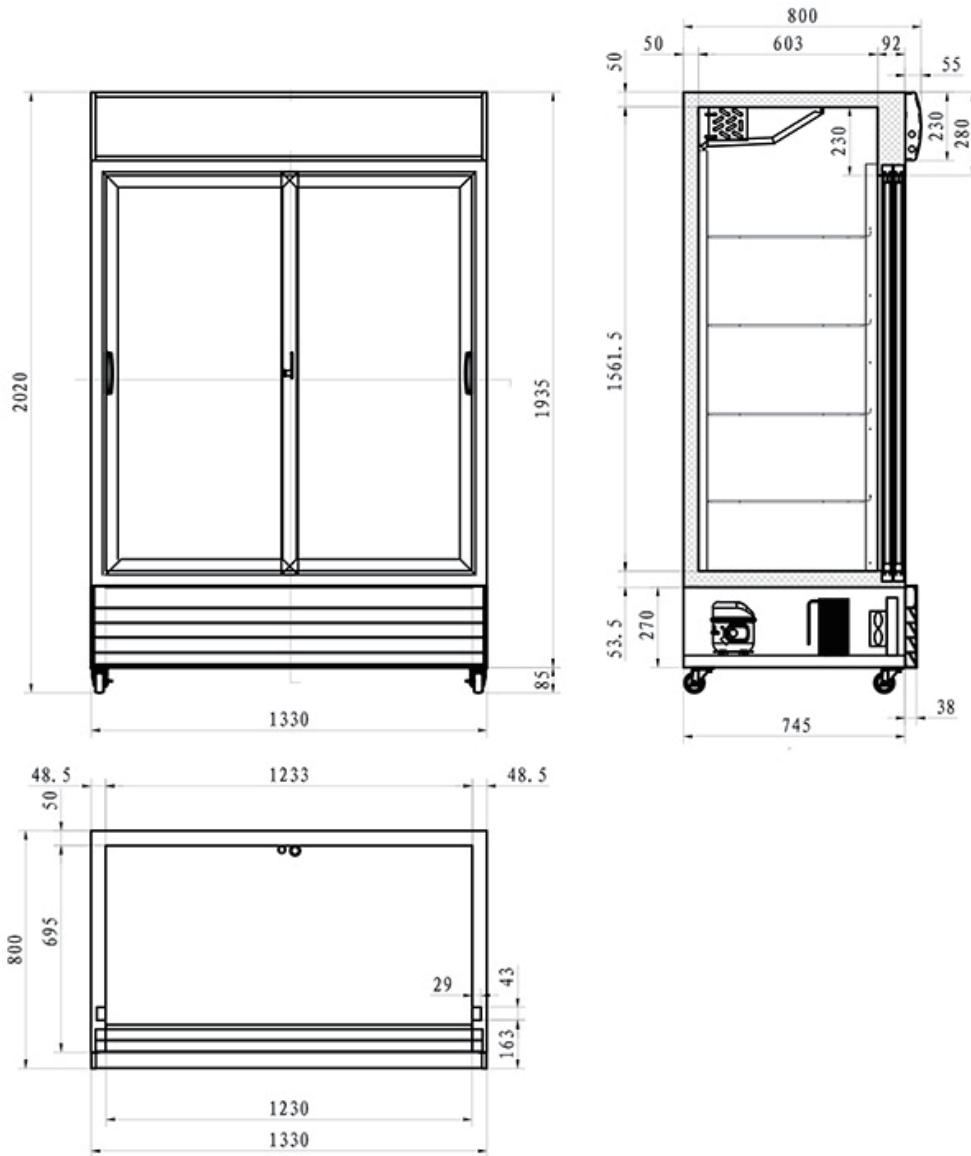

Model	Doors	Shelves	Dimension (mm) (inch)			HP	Voltage	Amps	Capacity (L) (Cu Ft.)	Net Weight (KG) (LBS)	Temperature Range	NEMA Config.
			L	D	H							
C2S-52.4GD	2	8	1330	800	2020	1/2	115/60	9.5	1400	178	0 ~ 8°C	5-15P
			52.4	31.5	79.5				50	392	33 ~ 45°F	

Specifications subject to change without notice.