


- **Stainless steel top, exterior and interior walls, and floor.**
- **Refrigeration system** keeps drinks at a safe temperature between 33F and 41F (0.5C to 5C)
- **Electronic control system** makes it easy to adjust the temperature set point and defrost frequency.
- **Heavy duty casters with brakes can be included with the fridge** (optional).
- **Shelves:** Adjustable heavy-duty PVC coated shelves.
- **Self-closing sliding doors with double-pane glass for enhanced insulation.**
- **Removable installation board** makes it easy to access the condenser coil for cleaning and service.
- **Refrigerant: HYDRO-CARBON R290.**

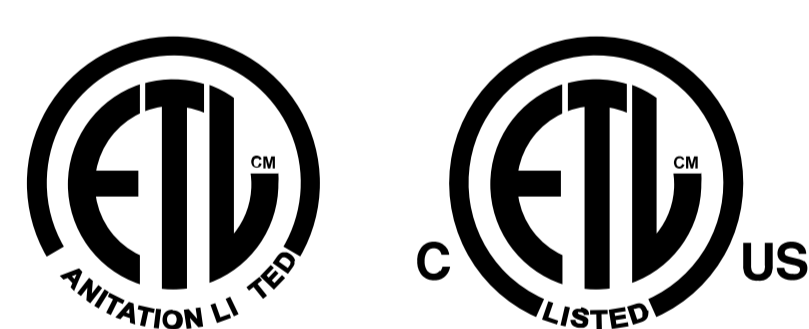

MODEL	DOORS	SHELVES	CAPACITY (cu.ft./ liters)	AMPS	HP	VOLTS	DIMENSIONS - WxDxH inches/mm			PLUG TYPE
							Width	Depth	Height*	
CBB-72GSD-SS	3	6	18.6 525	3.5	3/7	115/60/1	72 3/4 1848	24 7/16 620	35 5/8 905	MEMA 5-15P

\*Specifications are subject to change without prior notice.

**CANADA**  
 UBC COOL CANADA INC  
 1715 MEYERSIDE DRIVE, UNIT 7-9,  
 MISSISSAUGA, ON, CANADA, L5T1C5  
 ph.: +1 (905) 629-2597  
 Toll Free: +1 (866) 995-9965  
 fax.: +1 (905) 629-2577  
 Email: info@beer-co.ca

**USA**  
 UBC DISTRIBUTION USA INC  
 65 NORTH CENTRAL DR.  
 O'FALLON, MO 63366  
 ph.: +1 (636) 379-2226  
 Toll Free: +1 (888) 808-9286  
 fax.: +1 (866) 659-8904  
 Email: info@beer-co.us

**MÉXICO**  
 GRUPO CERVECERO UKRANIANO,  
 S.A DE C.V. TOKIO 714, PORTALES SUR,  
 BENITO JUÁREZ CIUDAD DE MÉXICO 03300  
 Tel: +52 (55) 2624 3458  
 Cel: +52 1 (55) 48668127  
 Email: s.reaskos@beer-co.com.mx