

STANDARD FEATURES

HEAVY DUTY CONSTRUCTION

Top is made of solid 18" gauge stainless steel, including drip tray(s) for easy cleaning. Wear-resistant black vinyl exterior, galvanized interior with durable stainless steel floor, and covered corners. Drain is located in rear of cabinets to keep unit pristine at all times.

STAY OPEN DOORS WITH LOCKS AND LIGHT

90° Stay open door feature and interior fluorescent light underneath the mullion.

MAGNETIC GASKETS

Built of one piece, the gasket is removable without tools for ease of cleaning and replacement.

ENHANCED REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. CFC free R-134a refrigerators maintain temperature between 33°F to 38°F, keeping beers ice cold

SIDE MOUNT COMPRESSOR & FRONT BREATHING

System allows easy service and unrestricted placement of the unit.

ANALOG THERMOSTAT

INTERCHANGEABLE DOORS

Field interchangeable doors from Solid to Glass or Glass to Solid based on operator's needs.

OPEN CAVITY

Evaporator located on left side above compressor providing an open cavity and more working room.




ADDC-58



ADDC-94





OPTIONS & ACCESSORIES

Single / Double draft towers / 3" Casters / 6" Adjustable stainless steel legs / Dunnage floor / 220v-50Hz-1Phase




MODEL	DOORS	AMPS	HP	VOLTAGE	NEMA PLUG	CABINET DIMENSIONS			SHIPPING	
						L	D	H	WT.	CUBES
SOLID DOOR										
ADDC-58	2	6.6	1/3	115/60/1	5-15P	59 1/2"	28"	37"	343	51
ADDC-68	2	6.6	1/3	115/60/1	5-15P	69 1/2"	28"	37"	370	59
ADDC-78	3	6.9	1/3	115/60/1	5-15P	80"	28"	36"	396	68
ADDC-94	3	7.2	1/3	115/60/1	5-15P	95 1/2"	28"	37"	429	81

KEG CONFIGURATIONS



PLAN VIEW

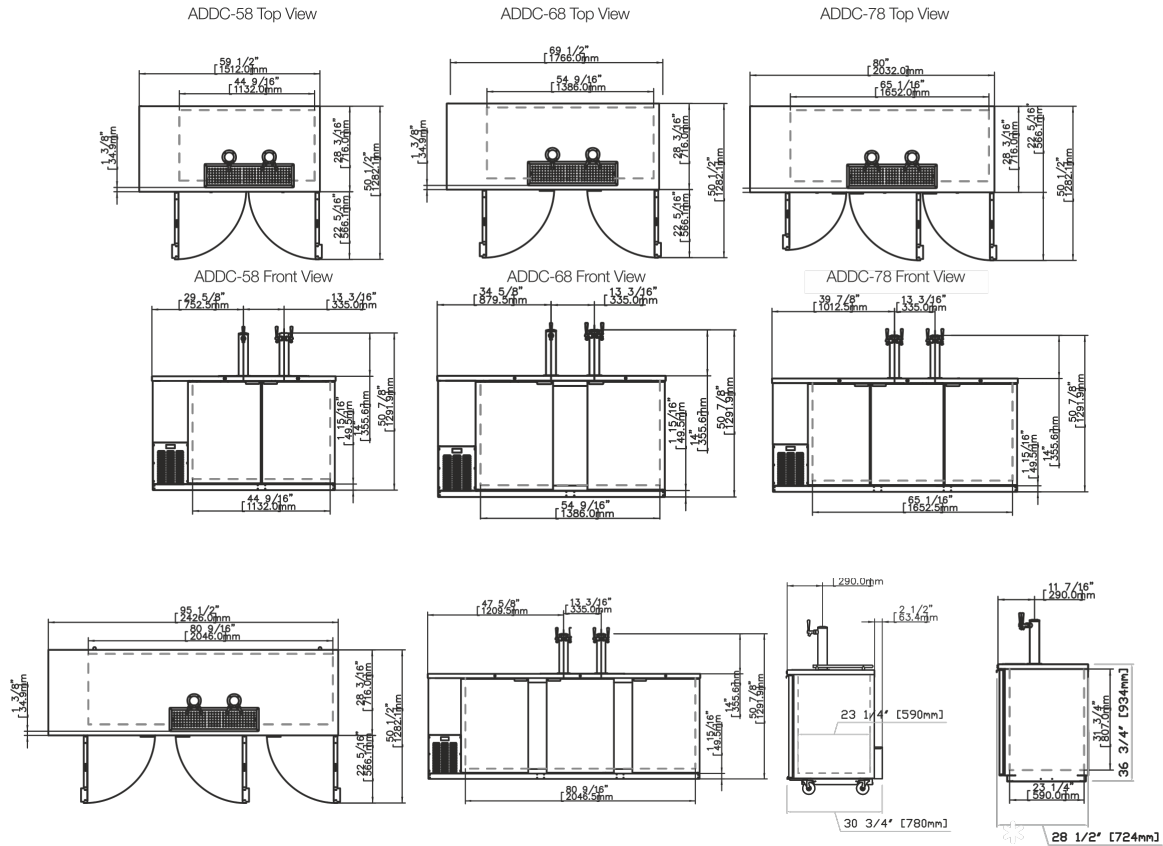

SPECIFICATIONS

CONSTRUCTION

- 18 gauge stainless steel top and stylish black vinyl finish front, sides and back. Interior built of galvanized steel walls with coved corner stainless steel floor. Interior fluorescent light.
- The entire cabinet has a 1-1/2" CFC-free, polyurethane insulation foamed-in-place.

- Field interchangeable doors with 90° stay open feature and locks standard. One piece magnetic gaskets for easy cleaning.
- Drain is located in the back, inside compressor housing.

REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Self-contained capillary tube system using environmentally-friendly and CFC-free refrigerant. R-134a holding temperature at 33°F to 38°F refrigerators.
- Front breathing/side mount compressor for ease of service and placement in narrow spaces. Condensing unit is behind the front grill, slides out for easy cleaning and maintenance.

- Forced air cooling system for faster cooling and constant temperature in the cabinet.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Analog thermostat.

ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

WARRANTY

Continental USA & Canada:

- One year:** Labor and parts warranty.
- Five year:** Compressor warranty.
- International:** One year parts only.